




# RESTORATION HARDWARE BENCH

DIY PLANS FOR A LOOK-A-LIKE

# Restoration Hardware Simple Bench DIY

Dimensions shown below

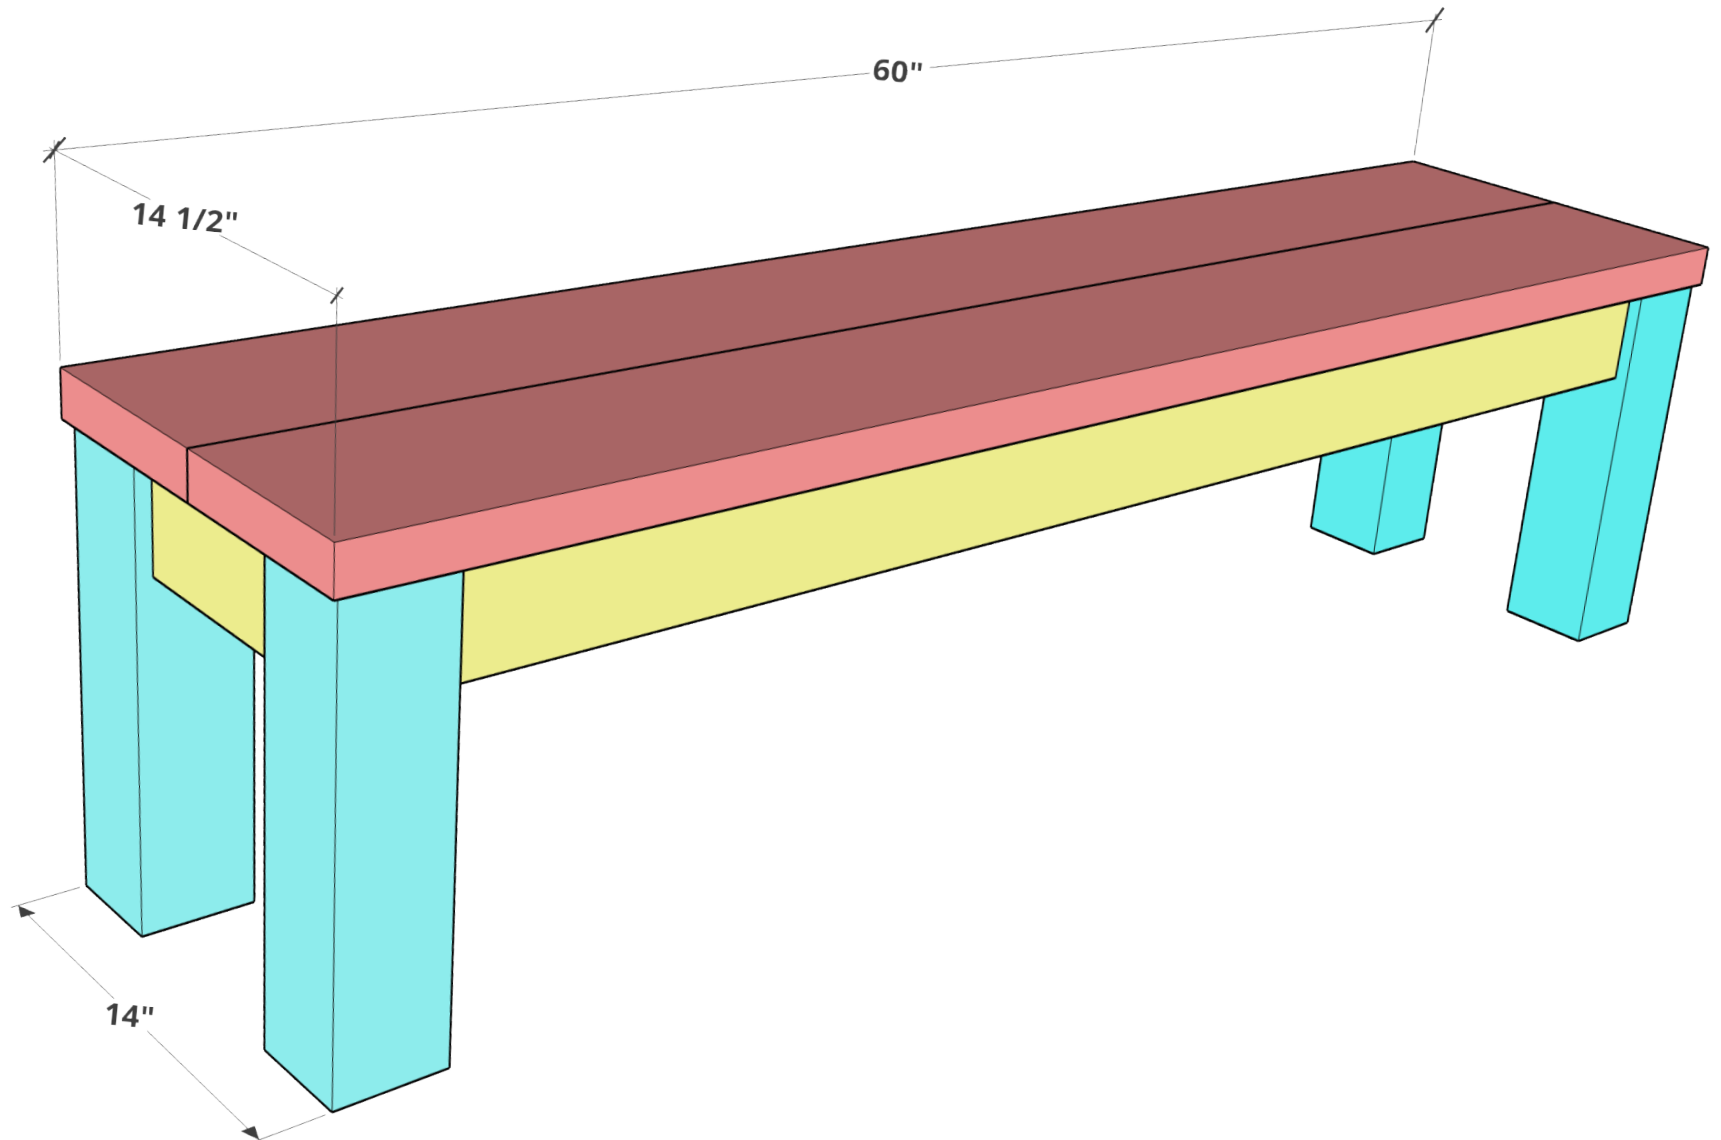


### Shopping List:


- 2 - 2x8 @ 8 ft long
- 2 - 2x4's @ 8 ft long
- 1 - 4x4 @ 8ft long
- 2 1/2 inch wood screws or Kreg screws

### General Instructions:

Make all necessary cuts as shown below. You will also need to pre-drill pocket holes on the yellow and white 2x4s as shown in the image below. Attach the frame to the legs and then the seat to the frame. There's your bench!

### Cut and Kreg List:

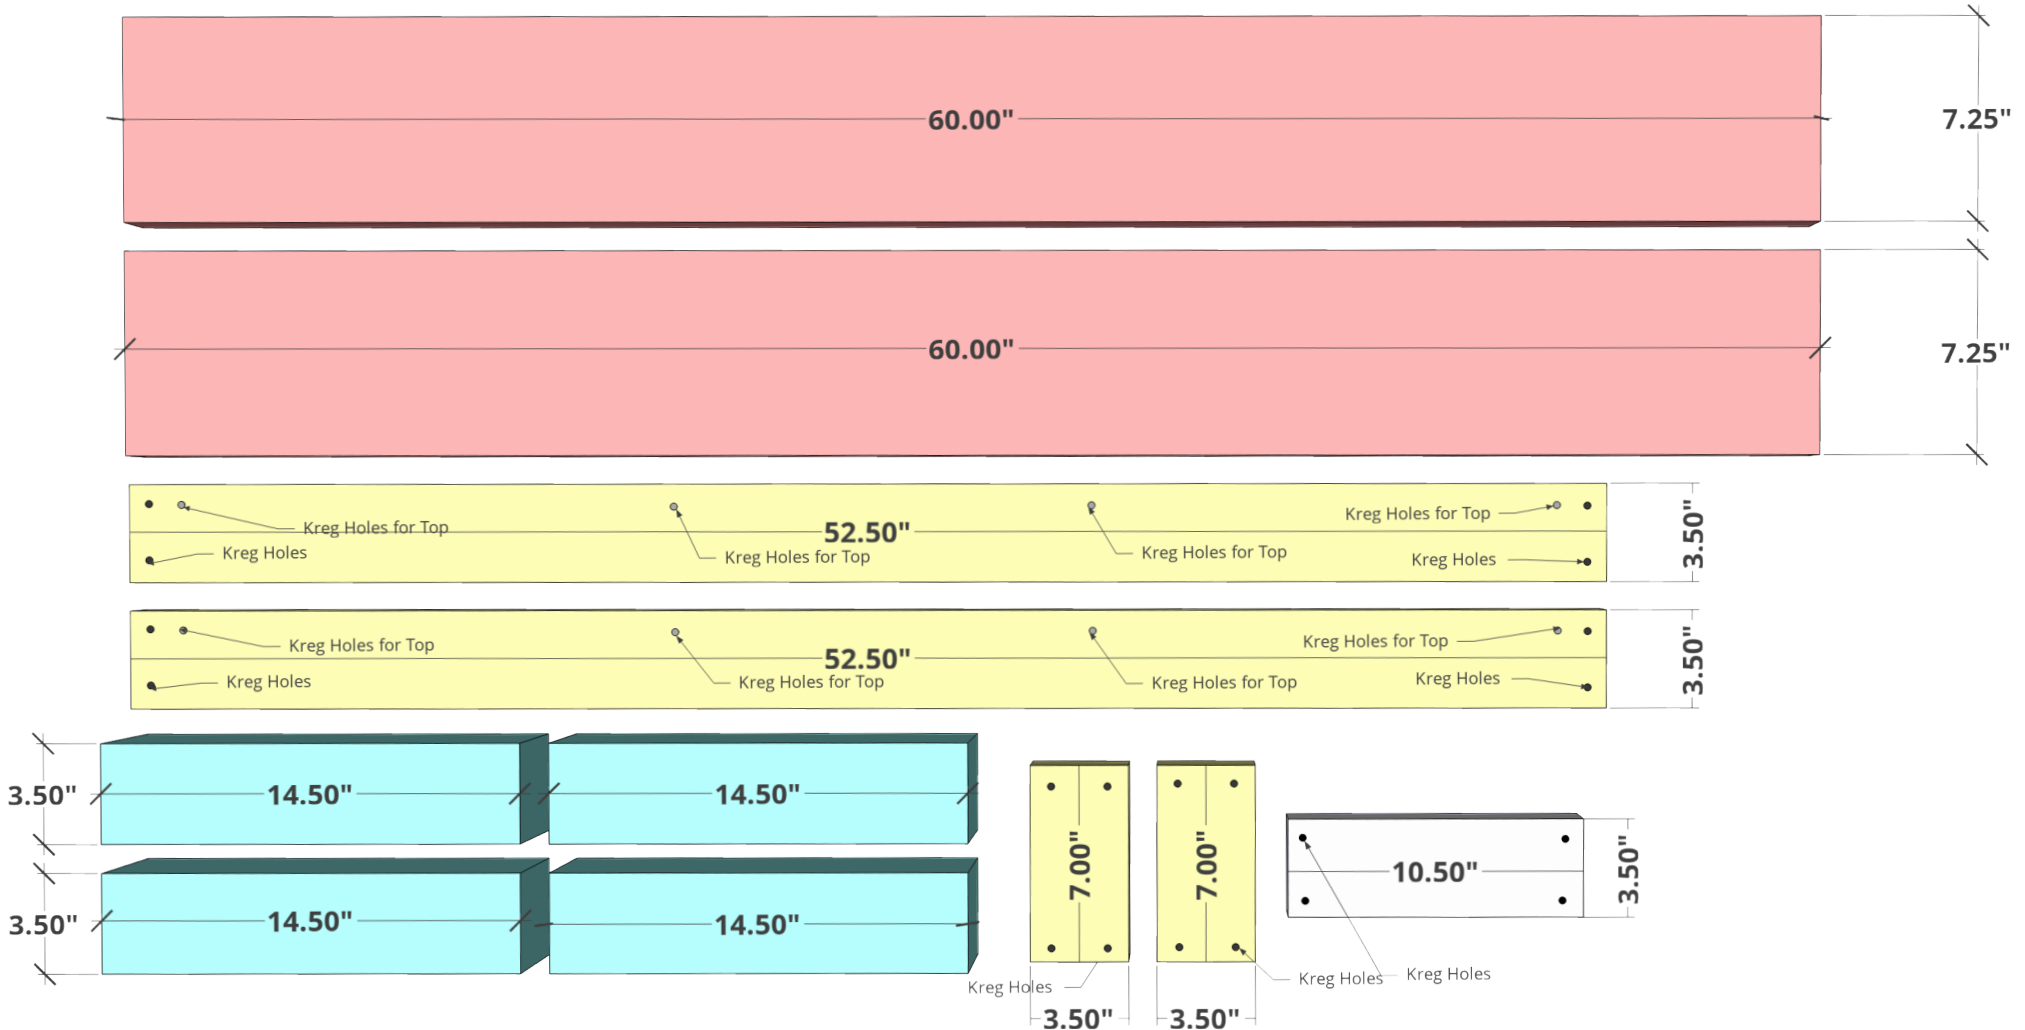

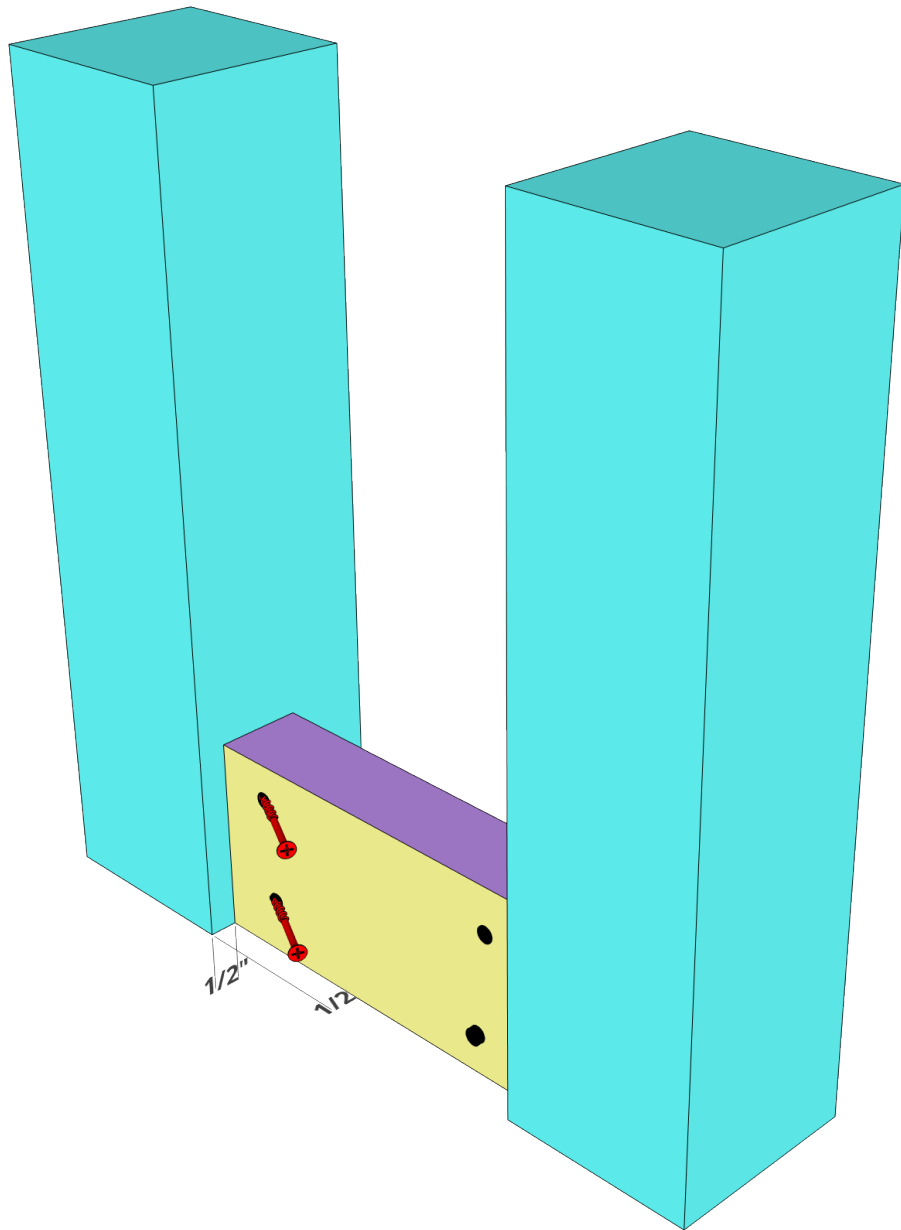

### Step 1

Once you have made all the necessary cuts and pocket holes from the above cut list, you will need to use your 2.5" screws to attach the 7" pieces of the frame to the 4x4 legs. As you are attaching the pieces, **please note** that they are attached upside down intentionally to make assembly easier.


Do this for both sides so you have two of the image on the left.

## Step 2

Attach the long side supports that are 52.5" long to the 4x4 sides you assembled in the previous step.

## Step 3


Attach the center support with your 2.5" screws. Exact center should be 30".

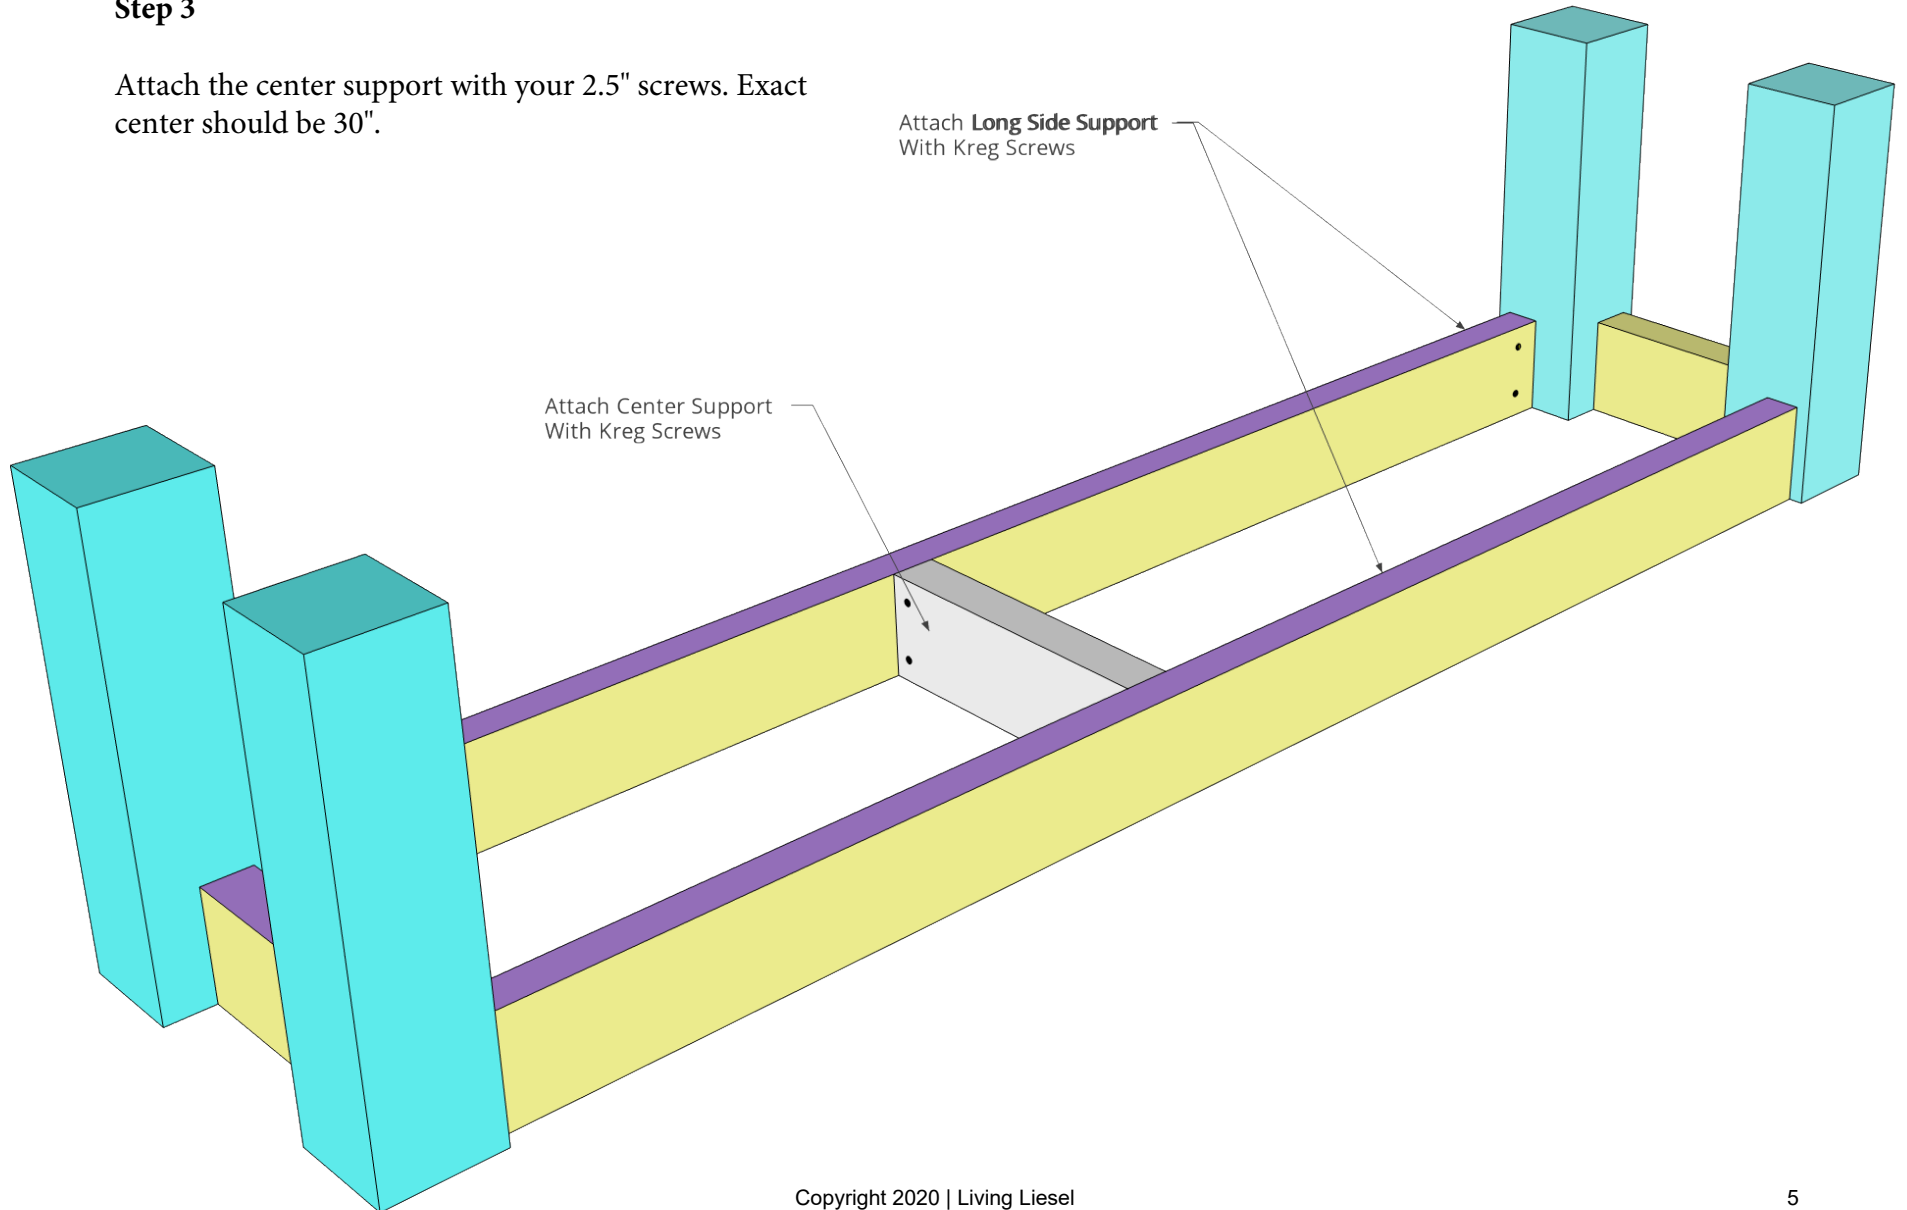

#### Step 4


Attach the two top pieces with 2.5" screws in the pre-drilled pocket holes.

This creates the bench seat.

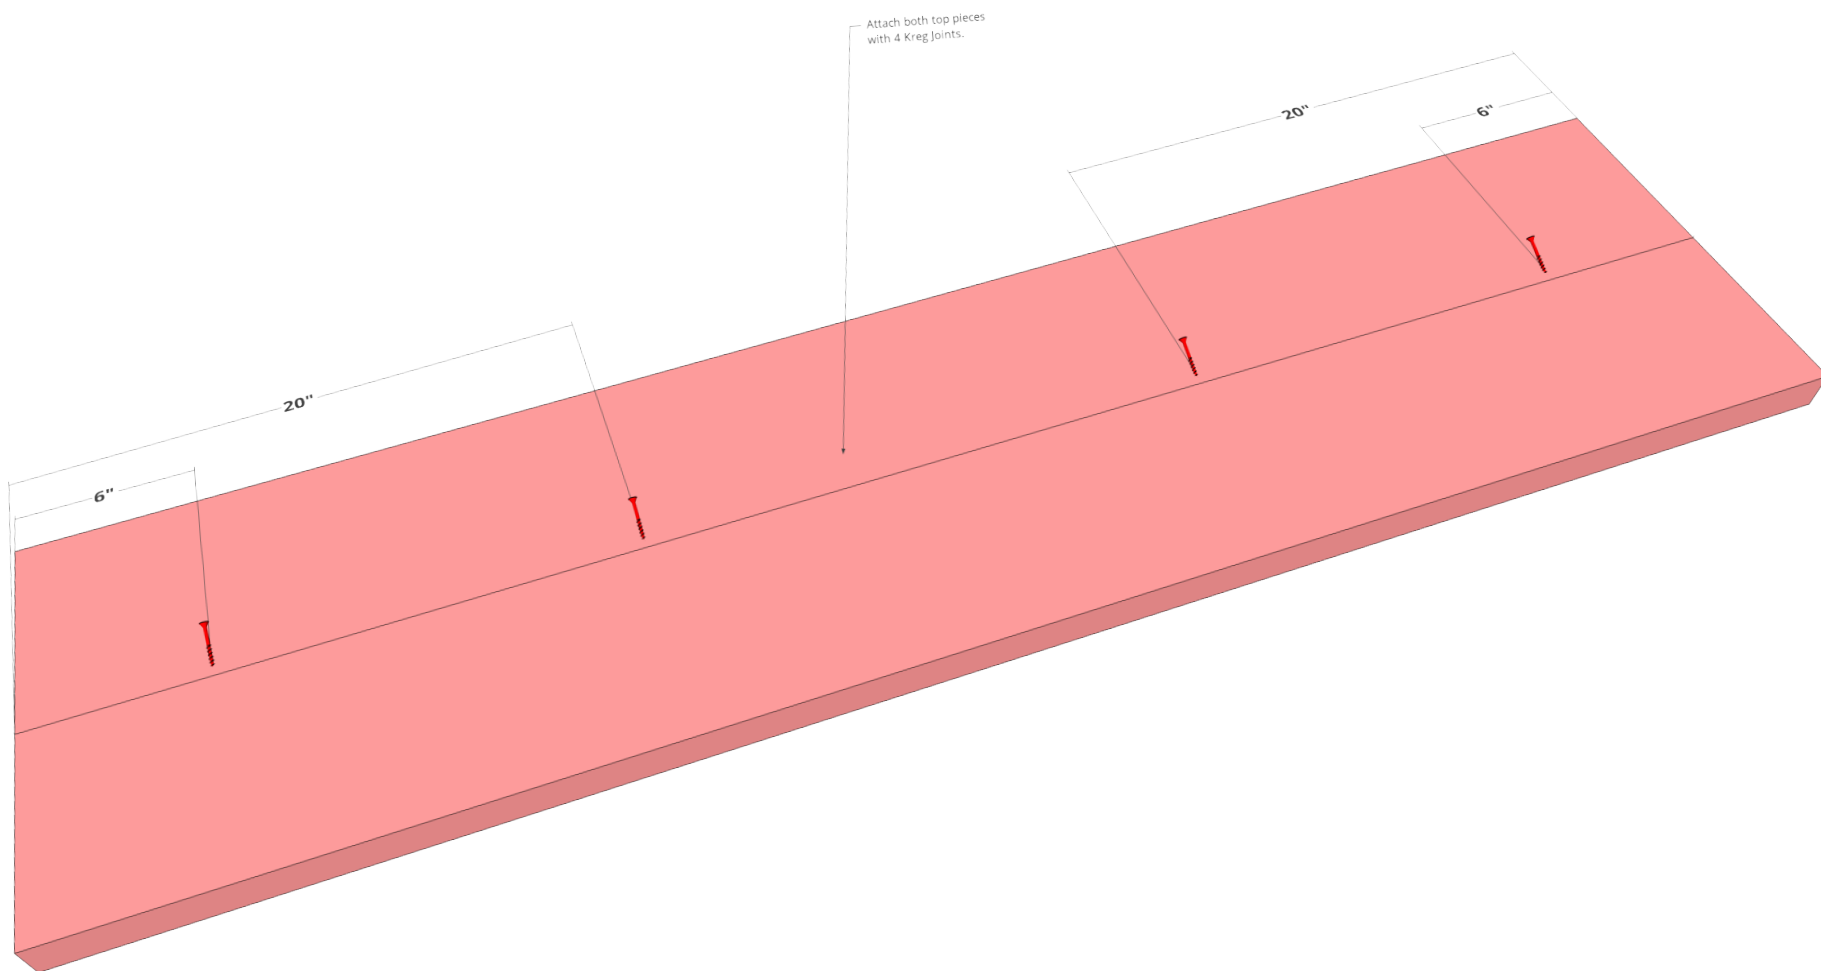

## Step 5

Attach the base to the top/bench seat with screws through the pocket holes.

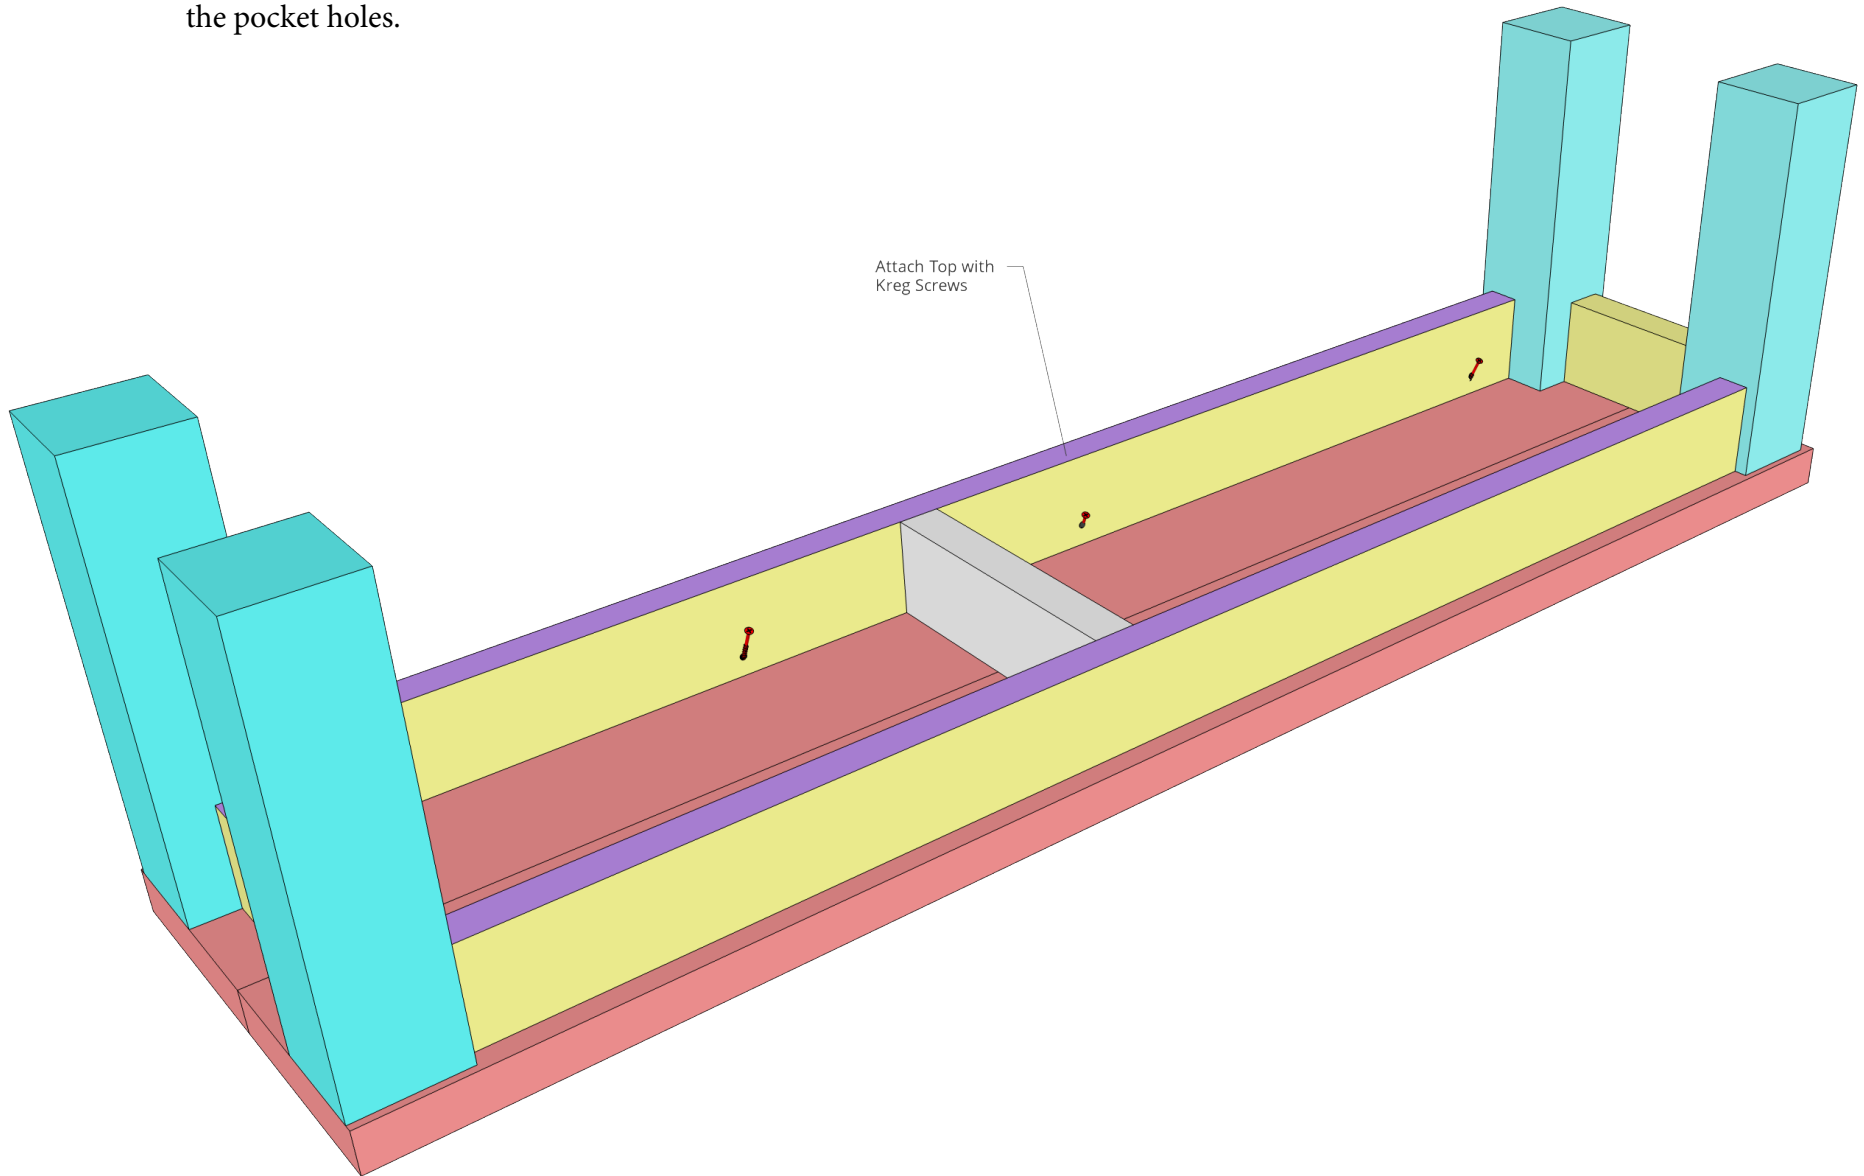

## **Step 6**

Sand, stain and finish. I always recommend using a test piece of wood so you can get an idea of what the stain and finish will look like. Sit back and enjoy your hard work come to life!